


## Structural Product Range



	Recommended Belt Speed	Recommended tonnage/hour
900mm	3.5m/s	1000TPH
1050mm	4.0m/s	1200TPH
1200mm	4.0m/s	1500 - 1800TPH
1400mm	4.0m/s	2000 - 2500TPH
1500mm	4.0 - 5.0m/s	1500 - 3500TPH
1600mm	4.0 - 5.0m/s	3000 - 3500TPH
1800mm	5.0m/s	4500 - 5000TPH
2000mm	5.0m/s	5000 - 6500TPH

Viking Conveyor provides a varied and extensive structural range all with the capability of being manufactured to suit customer needs. The following range is only a sample of what Viking Conveyor has to offer.

### 900mm Varitrough Structure

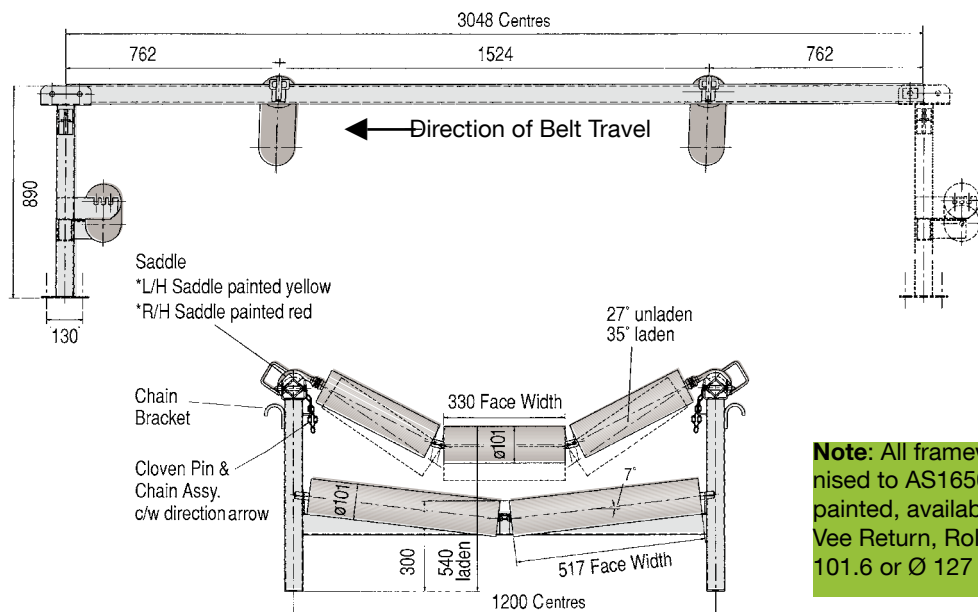

**Note:** All framework galva-nised to AS1650, Roller ends painted, available with Flat or Vee Return, Roller diameter Ø 101.6 or Ø 127

Call us on **0800 845 464**  
[www.vikingconveyor.co.nz](http://www.vikingconveyor.co.nz)